
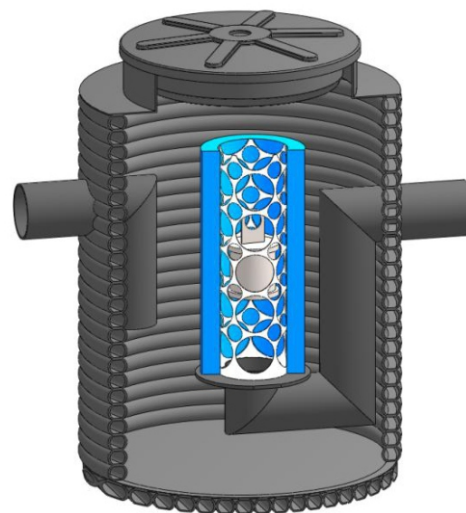


Hydrocarbon separators  
with coalescence insert  
**SKHP**

**Basic parameters**

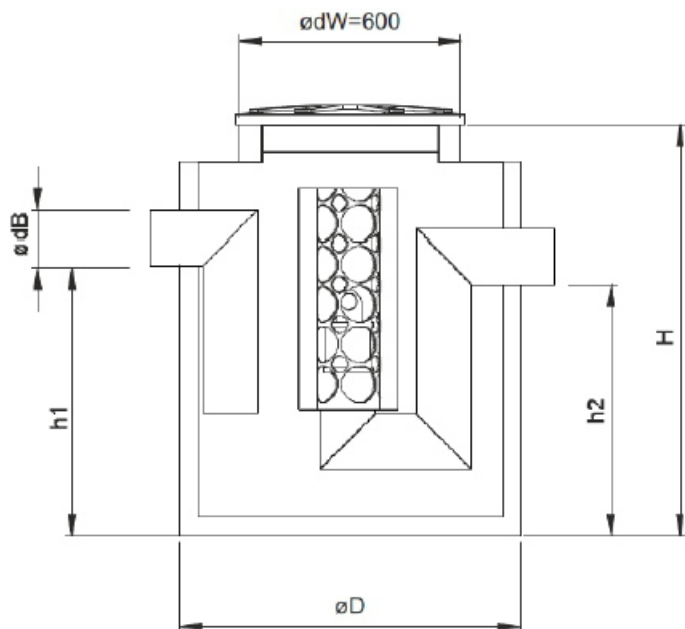

Model	Nominal Flow	Separator Diameter D	Height H	Height h1/h2	Inlet/Outlet Diameter	Manhole Diameter	Total Capacity
	[l/s]	[mm]	[mm]	[mm]	[mm]	[mm]	[m <sup>3</sup> ]
SKHP-1,5	1,5	910	1170	660/630	110	600	0,3
SKHP- 3	3	910	1290	730/700	160	600	0,4
SKHP- 6	6	1130	1630	1070/1040	160	600	0,5
SKHP- 8	8	1130	1630	1070/1040	160	600	0,8
SKHP- 10	10	1130	1780	1220/1190	160	600	1
SKHP- 15	15	1290	2010	1410/1370	200	600	1,6
SKHP- 20	20	1290	2090	1490/1450	200	600	1,7
SKHP- 25	25	1290	2370	1720/1680	250	600	1,9
SKHP- 30	30	1630	2200	1550/1510	250	600	2,7
SKHP- 40	40	1630	2400	1680/1640	315	600	3
SKHP- 50	50	1630	3000	2280/2240	315	600	4

Individual solutions are also possible, guaranteeing higher capacities and higher flows.

At the customer's request it is possible to change the diameter of the connections.

Optional devices:

- additional extensions
- alarm systems