


Hydrocarbon separators
with settler and coalescence insert

SKP, SKPD



Basic parameters

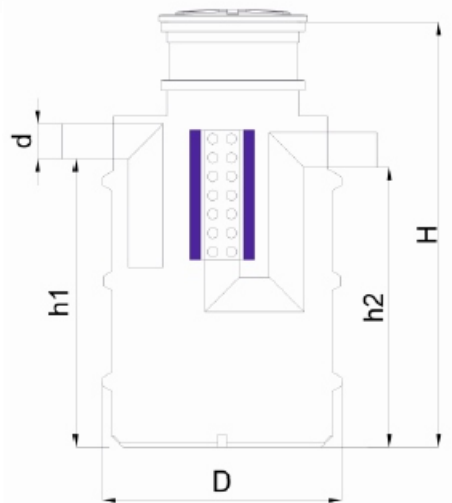

Model	Nominal Flow	Height H	Width D	Height h1/h2	Inlet/Outlet Diameter	Manhole Diameter	Total Capacity	Settler Capacity	Light Liquids Volume
	[l/s]	[m]	[m]	[cm]	[mm]	[mm]	[m ³]	[m ³]	[l]
SKPD-1,5	1,5	1,5	1,1	108/104	110	600	0,85	0,45	40
SKP-3	3	1,5	1,1	108/104	160	600	0,85	0,45	70
SKPD-3	3	1,96	1,1	134/130	160	600	1,15	0,65	70
SKP-6	6	1,96	1,1	134/130	160	600	1,15	0,65	140
SKP-8	8	2,08	1,22	142/138	160	600	1,55	0,8	180
SKPD-10	10	2,51	1,22	180/176	160	600	2,05	1,4	230
SKPD-15	15	2,47	1,54	172/168	160	600	3	1,8	340

Individual solutions are also possible, guaranteeing larger volumes and larger flows.
At customer's request it is possible to change the diameter of the connections.

Optional devices:

- additional extensions
- alarm systems