


STHP , STHP-O (with settler)

Basic parameters

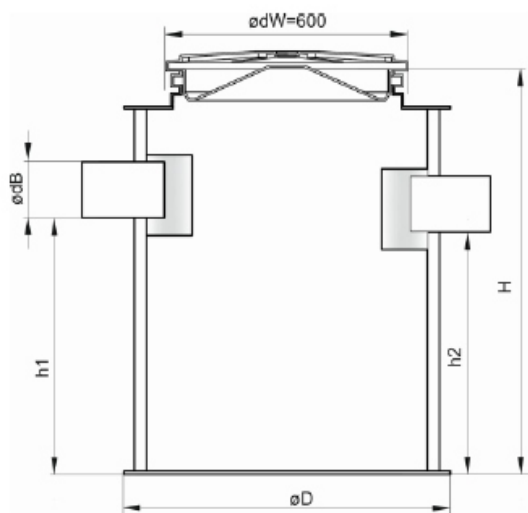

GREASE SEPARATORS (VERTICAL)

Model	Nominal Flow [l/s]	Separator Diameter D [mm]	Height H [mm]	Height h ₁ /h ₂ [mm]	Inlet/Outlet Diameter [mm]	Manhole Diameter [mm]	Total Capacity [m ³]
STHP-1	1	710	1560	1200/1160	110	600	0,4
STHP-2	2	910	1410	1050/1010	110	600	0,7
STHP-4	4	1130	1620	1210/1170	160	600	1,2
STHP-6	6	1290	1690	1280/1240	160	600	1,8
STHP-7	7	1290	1870	1460/1420	160	600	2,0
STHP-8	8	1630	1500	1290/1250	160	600	2,4
STHP-10	10	1630	1830	1420/1380	160	600	3,0

GREASE SEPARATORS (VERTICAL WITH SETTLER)

Model	Nominal Flow [l/s]	Separator Diameter D [mm]	Height H [mm]	Height h ₁ /h ₂ [mm]	Inlet/Outlet Diameter [mm]	Manhole Diameter [mm]	Total Capacity [m ³]	Settler Capacity [m ³]
STHP-O 1	1	710	1950	1590/1550	110	600	0,5	0,1
STHP-O 2	2	910	1810	1450/1410	110	600	0,9	0,2
STHP-OO 2	2	1130	1800	1440/1400	110	600	1,35	0,4
STHP-O 4	4	1130	2070	1660/1620	160	600	1,5	0,4
STHP-OO 4	4	1290	1960	1550/1510	160	600	2,1	0,8
STHP-O 6	6	1630	1600	1190/1150	160	600	2,7	0,6
STHP-OO 6	6	1630	1900	1490/1450	160	600	3,1	1,2
STHP-O 7	7	1630	1700	1290/1250	160	600	2,8	0,7
STHP-OO 7	7	1630	2140	1730/1690	160	600	3,6	1,4
STHP-O 8	8	1630	1980	1570/1530	160	600	3,3	0,8
STHP-OO 8	8	1630	2100	1690/1650	160	600	3,5	1,6
STHP-O 10	10	1630	2300	1850/1810	160	600	3,9	1,0
STHP-OO 10	10	1630	2600	2150/2110	160	600	4,4	2,0

Individual solutions are also possible, guaranteeing larger volumes and larger flows.

At customer's request it is possible to change the diameter of the connections.

Optional devices: additional extensions, alarm systems